

AL SERIES SUPPLEMENTARY INSTALLATION INSTRUCTIONS



Materials Required by Contractor:

- 90°C rated supply conductors
- Silicone Sealant Caulk
- 9mm or S size drill bit
- 5/32 hex key

⚠ Before Starting Work:

- Ensure that all electrical connections are not live! Take all steps necessary to make sure that electrical connections will not become live accidentally during installation.
- Ensure input voltage is correct per ETL label on luminaire.

✔ Installation Steps:

1. Remove two screws on side of wall pack, allowing the two sections of the wall pack, allowing the two sections to hinge apart. Separate two parts of all pack.
2. Use raised guide lines to drill three 9mm or S sized holes in all pack's mounting plate (Fig. 1). These holes will be used to fasten the all pack to the adjustable slip fitter.
3. Install all pack's mounting plate to slip fitter using provided fasteners. Be sure to use the gasket provided between the two parts (Fig. 2). Use silicone sealant around fasteners and electrical hole to ensure water cannot enter.
4. Make sure that the slip fitter is at the correct angle for intended application. If needed, use a Philips screwdriver to open the side of the slip fitter and change the angle (Fig. 3). Make sure to tighten it completely before replacing the cover on the side.
5. Place mounting plate and slip fitter onto tenon or pole and secure. Bring electrical through slip fitter to all pack mounting plate. Seal all threads with silicone to ensure water cannot enter.

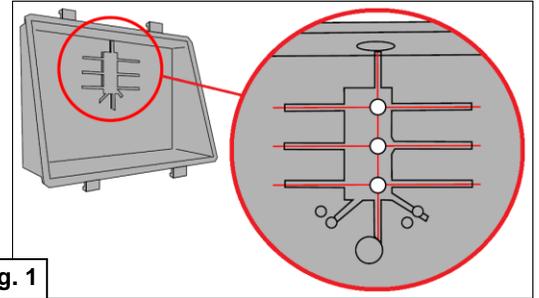


Fig. 1

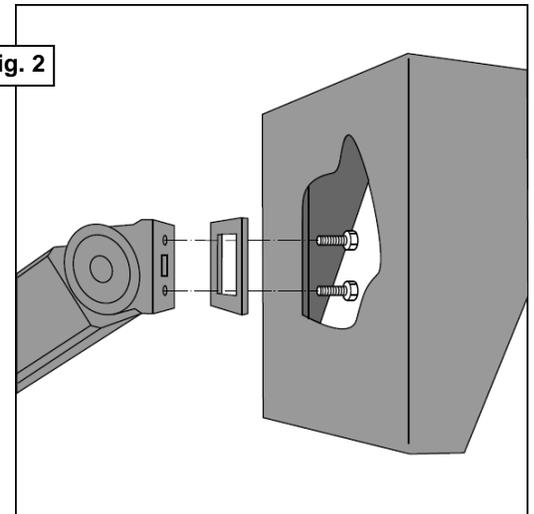


Fig. 2


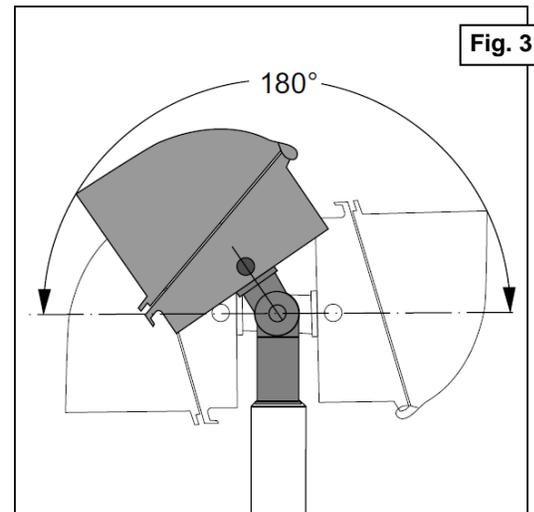


Fig. 3

6. Slide front section of luminaire down onto the all pack mounting plate's top hinges. Make all electrical connections as labeled on luminaire power supply (Fig. 4). Note: if ground connection is made through the electrical conduit, both ground tabs on luminaire must be connected with each other. This ensures that both sections of the all pack are grounded. Use 90°C rated supply conductors.

Black = Live
White = Neutral
Green = Ground

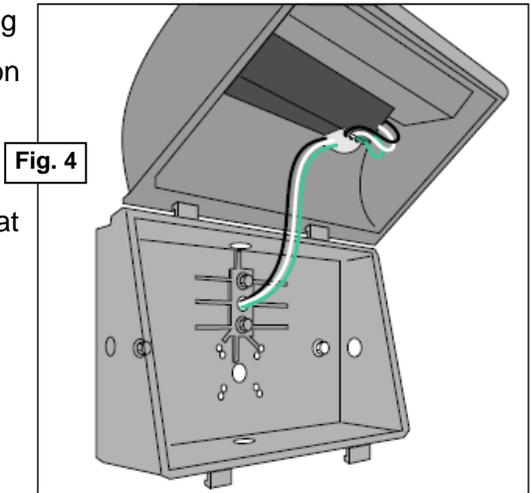

7. Close up all pack and reinstall screws to secure both sections of all pack together. Check that seals are properly positioned to ensure no water enters luminaire.

